

Q U I X O T E

STAGE 6

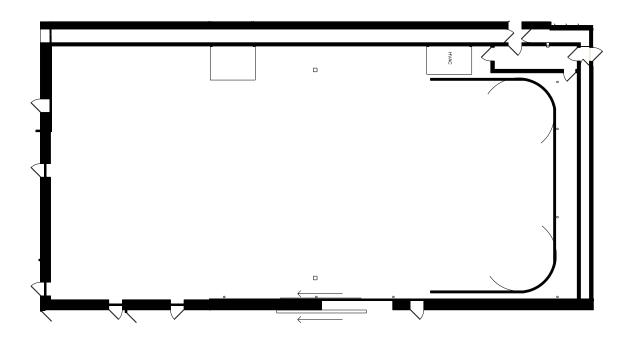



WIDTH	LENGTH	HEIGHT (PERMS)	TOTAL STAGE Square footage	FLOOR TYPE	DOOR (WxH)
47'	112'	21'	6,700	CEMENT & CYC	16' X 16'

^{*}Dimensions are for overall stage size and do not take into account stage irregularities. Production company representative should verify dimensions for particular applications.

Q U I X O T €

STAGE SPECIFICATION - STAGE 6

STAGE SPECIFICATIONS

WIDTH - 47'

LENGTH - 112'

HEIGHT - 21'

FIRE LANE - 4'

TOTAL SQUARE FOOTAGE – 6,700

ELEPHANT DOOR - 16' X 16'

OCCUPANCY LOAD - 650

POWER

POWER/AMPS - 120-208V / 1,200A

DISCONNECTS PER STAGE – 1

HVAC

HVAC - FULLY SELF CONTAINED (40 TON COOLING CAPACITY)

REDLIGHT CONTROL - YES

BELL & LIGHT SYSTEM - YES

FLEX DUCT CONNECTION - YES

EXHAUST FANS - YES

STAGE EXTRAS

RAMP LOADING - NO

MOTORIZED ELEPHANT DOOR - NO

PIPE GRID PSF - SO. 8/NO. 7

WATER AVAILABLE OUTSIDE - YES

OF PARKING SPACES - 43

^{*}Dimensions are for overall stage size and do not take into account stage irregularities. Production company representative should verify dimensions for particular applications.